



Spot		Medium		Flood		Wide Flood	
14°		28°		39°		54°	
m	ø	m	ø	m	ø	m	ø
1.0	0.25	1.0	0.50	1.0	0.72	1.0	1.02
2.0	0.49	2.0	1.00	2.0	1.43	2.0	2.04
3.0	0.74	3.0	1.50	3.0	2.15	3.0	3.06

Flex I 3000

Technical specification

Recessed down light with pull out spot lights for LED lamps. Reflector with four different beam spreads. Black front ring.

Model and colors White


Area of use Down light for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	1.5 kg
Form of protection	IP 20, class III
Color temperature	3 000 K
Color rendering index (CRI)	90
Light source	LED
Operating position	Vertical/retractable
Start time	Instant
Driver	Separate
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
280-504-10	Spot	White
280-504-20	Spot	Black
280-504-30	Spot	Grey
280-505-10	Medium	White
280-505-20	Medium	Black
280-505-30	Medium	Grey
280-506-10	Flood	White
280-506-20	Flood	Black
280-506-30	Flood	Grey
280-507-10	Wide flood	White
280-507-20	Wide flood	Black
280-507-30	Wide flood	Grey

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	2900	26	A++
930	2900	30	A+
840	3000	26	A++
940	2900	29	A+

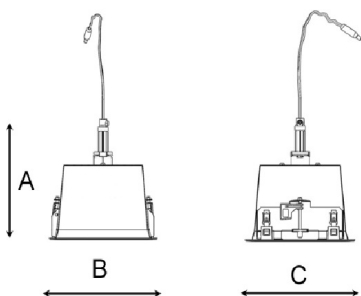

Saw instruction: 177 x 191 mm

A 210 B 200 C 200 (mm)

Note

Product available with meat and bread COB.

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.