


Flex III 3000

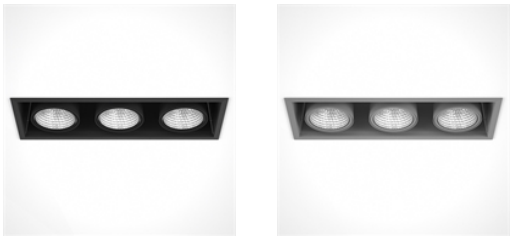

Technical specification

Recessed down light with pull out spot lights for COB LED. Reflector with four different beam spreads. Black front ring.

Model and colors White, black and grey

Area of use Down light for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	4.6 kg
Form of protection	IP 20, class III
Color temperature	3 000 K
Color rendering index (CRI)	90
Light source	LED
Operating position	Vertical/retractable
Start time	Instant
Driver	Separate
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood

Spot		Medium		Flood		Wide Flood	
	14°		28°		39°		54°
m	ø	m	ø	m	ø	m	ø
1.0	0.25	1.0	0.50	1.0	0.72	1.0	1.02
2.0	0.49	2.0	1.00	2.0	1.43	2.0	2.04
3.0	0.74	3.0	1.50	3.0	2.15	3.0	3.06

Art no	Description	Color
280-5xx-10*	Spot, Medium, Flood or Wide flood	White
280-5xx-20*	Spot, Medium, Flood or Wide flood	Black
280-5xx-30*	Spot, Medium, Flood or Wide flood	Grey



Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	3x3000	3x26	A++
930	3x3000	3x30	A++
840	3x3200	3x26	A++
940	3x3000	3x29	A+

Note

*Art nr. xx = Depends on beam choices.

Product available with meat or bread COB.

Final shipping destination may require minor modifications of components as well as catalogue numbers, be sure to state the country in which the fixtures will be used.

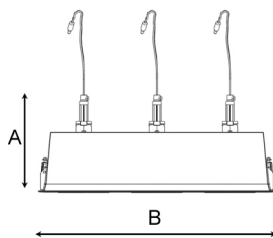

Saw instruction: 477 x 512 mm

A 210 B 516 C 200 (mm)