



## Grid LED 4000 for ceiling mount

### Technical specification

Linear down light for LED tubes. Reflector with flood beam spread. Housing of powder painted sheet metal.


**Model and colors** Available in white.

**Area of use** LED light for indoor ceiling applications, suitable for general lighting.

### Technical data

Mains (input) voltage	220-240 V
Total weight	3,7 kg
Form of protection	IP 20, class I
Color rendering index (CRI)	80+
Light source	LED
Operating position	Vertical
Lamp holder	NLAB Standard
Start time	Instant
Driver	Built in
Reflector	High quality anodized reflector
Beam spreads	Flood
Design lifetime	L80 B10 50 000h

Flood	
97°/76°	
m	∅
1.0	2.27
2.0	4.54
3.0	6.81




Art no	Description	Color
204-547	GRID LED 4000, 1541mm, 830 for ceiling mount	White
204-548	GRID LED 4000, 1541mm, 835 for ceiling mount	White
204-549	GRID LED 4000, 1541mm, 840 for ceiling mount	White

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	3800	34	A+
835	3900	34	A+
840	4000	34	A+

### Note

Product also available in higher power levels. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

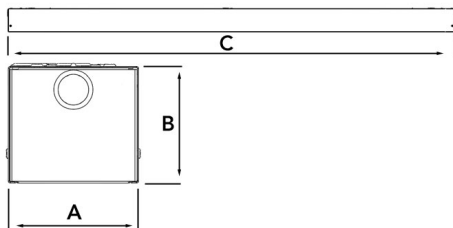

A 89,4 B 80,4 C 1541 (mm)