


Spot		Medium		Flood	
16°		31°		42°	
m	ø	m	ø	m	ø
1.0	0.28	1.0	0.56	1.0	0.78
2.0	0.57	2.0	1.12	2.0	1.55
3.0	0.85	3.0	1.68	3.0	2.33

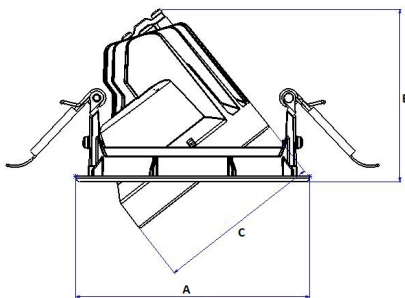

A 120 B 88 C 85 (mm)

## Moon mini 1500

### Technical specification

Tiltable and rotating down light with chip on board and separated NL Power LED electronic ballast for optimal life time and light flow performance. High quality reflector with three different beam spreads. Lamp housing of die-cast aluminium for optimal cooling and low weight.

**Model and colors** Available in white, black and grey.

**Area of use** Down light for indoor applications.

### Technical data

Mains (input) voltage	220-240 V
Total weight	0.45 kg
Form of protection	IP 20, class III
Color temperature	3 000 K
Color rendering index (CRI)	90
Light source	LED
Operating position	Vertical/Gyro
Start time	Instant
Driver	Stand alone, included
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
315-500-10	Spot	White
315-500-20	Spot	Black
315-500-30	Spot	Grey
315-501-10	Medium	White
315-501-20	Medium	Black
315-501-30	Medium	Grey
315-502-10	Flood	White
315-502-20	Flood	Black
315-502-30	Flood	Grey

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	1450	12	A++
930	1400	13	A++
840	1400	10	A++
940	1400	12	A++

### Note

Product available in other Kelvin temperatures on request. Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.



Saw instruction: ø 112 mm