



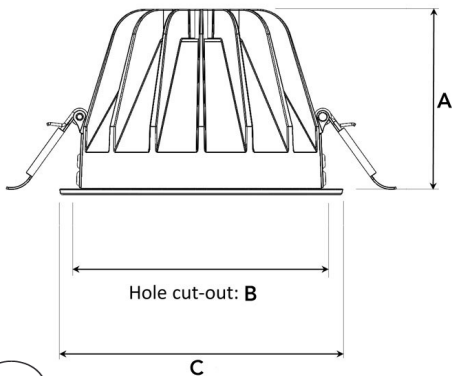

| Spot | | Medium | | Flood | | Wide Flood | |
|------|------|--------|------|-------|------|------------|------|
| 17° | | 32° | | 41° | | 57° | |
| m | ø | m | ø | m | ø | m | ø |
| 1.0 | 0.30 | 1.0 | 0.58 | 1.0 | 0.76 | 1.0 | 1.09 |
| 2.0 | 0.60 | 2.0 | 1.16 | 2.0 | 1.51 | 2.0 | 2.19 |
| 3.0 | 0.91 | 3.0 | 1.74 | 3.0 | 2.27 | 3.0 | 3.28 |



Saw instruction: ø 150

A 106 B 150 C 160 (mm)

Titan L 4000

Technical specification

Recessed down light with chip on board and separated NL Power LED electronic ballast for optimal life time and light flow performance. High quality reflector with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling and low weight.

Model and colors Available in white, black and grey.

Area of use Down light for indoor applications.

Technical data

| | |
|-----------------------------|---------------------------------|
| Mains (input) voltage | 220-240 V |
| Total weight | 0,85 kg |
| Form of protection | IP 20, class III |
| Color temperature | 3 000 K |
| Color rendering index (CRI) | 90 |
| Light source | LED |
| Operating position | Vertical |
| Start time | Instant |
| Driver | Stand alone, included |
| Optics | Metalized aluminum reflector |
| Beam spreads | Spot, Medium, Flood, Wide flood |

| Art no | Description | Color |
|------------|-------------|-------|
| 292-510-10 | Spot | White |
| 292-510-20 | Spot | Black |
| 292-510-30 | Spot | Grey |
| 292-511-10 | Medium | White |
| 292-511-20 | Medium | Black |
| 292-511-30 | Medium | Grey |
| 292-512-10 | Flood | White |
| 292-512-20 | Flood | Black |
| 292-512-30 | Flood | Grey |
| 292-513-10 | Wide flood | White |
| 292-513-20 | Wide flood | Black |
| 292-513-30 | Wide flood | Grey |

| Type | Delivered lumen output (lm) | System power (W) | EEI ³ |
|------|-----------------------------|------------------|------------------|
| 830 | 4400 | 40 | A++ |
| 930 | 3800 | 40 | A+ |
| 840 | 4100 | 35 | A++ |
| 940 | 4000 | 40 | A++ |

Note

. Product available in other Kelvin temperatures on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.