




Spot		Medium		Flood		Wide Flood	
17°		32°		41°		57°	
m	ø	m	ø	m	ø	m	ø
1.0	0.30	1.0	0.58	1.0	0.76	1.0	1.09
2.0	0.60	2.0	1.16	2.0	1.51	2.0	2.19
3.0	0.91	3.0	1.74	3.0	2.27	3.0	3.28



A 195 B 122 C 178 (mm)

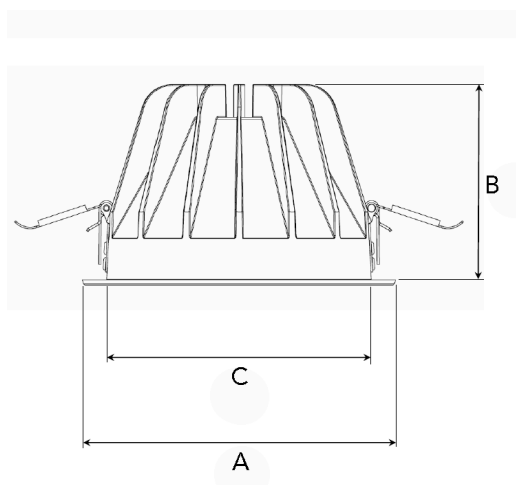

Saw instruction: ø 178

## Titan XL 5000

### Technical specification

LED down light with electronic driver and Chip on board. High color rendering index +90. High quality reflector with different beam spreads. Lamp housing of die-cast aluminium for optimal cooling, long lifetime and low weight.

**Model and colors** Available in white, black and grey.

**Area of use** Down light for indoor applications.

### Technical data

Mains (input) voltage	220-240 V
Total weight	0,85 kg
Form of protection	IP 20, class III
Color temperature	3 000 K
Color rendering index (CRI)	90
Light source	LED
Operating position	Vertical/fixed
Start time	Instant
Driver	Stand alone, included
Reflector	Anodised Aluminium
Beam spreads	Spot, Medium, Flood, Wide flood

Art no	Description	Color
284-510-10	Spot	White
284-510-20	Spot	Black
284-510-30	Spot	Grey
284-511-10	Medium	White
284-511-20	Medium	Black
284-511-30	Medium	Grey
284-512-10	Flood	White
284-512-20	Flood	Black
284-512-30	Flood	Grey
284-513-10	Wide flood	White
284-513-20	Wide flood	Black
284-513-30	Wide flood	Grey
232-39	Support plate	-

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	5440	50	A++
930	4660	50	A+
840	4600	40	A++
940	5000	50	A++

### Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.