




Spot		Medium		Flood		Wide Flood	
14°		28°		39°		54°	
m	ø	m	ø	m	ø	m	ø
1.0	0.25	1.0	0.50	1.0	0.72	1.0	1.02
2.0	0.49	2.0	1.00	2.0	1.43	2.0	2.04
3.0	0.74	3.0	1.50	3.0	2.15	3.0	3.06

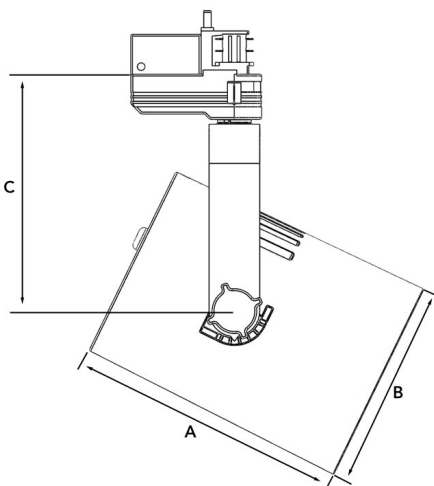

A 162 B 121 C 139 (mm)

## Tubix 3000

### Technical specification

Track light with incorporated electronic gear and Chip on board. High quality reflectors with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling, long lifetime and low weight. Black front ring.

**Model and colors** Available in white, black and grey.

**Accessories** Flaps kit

**Area of use** Track light for indoor applications.

### Technical data

Mains (input) voltage	220-240 V
Total weight	1,2 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Light source	LED
Operating position	360°/90°
Driver	Built in
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Art no	Description	Color
274-504-10	Spot	White
274-504-20	Spot	Black
274-504-30	Spot	Grey
274-505-10	Medium	White
274-505-20	Medium	Black
274-505-30	Medium	Grey
274-506-10	Flood	White
274-506-20	Flood	Black
274-506-30	Flood	Grey
274-507-10	Wide flood	White
274-507-20	Wide flood	Black
274-507-30	Wide flood	Grey
274-210-100-xx*	Flaps kit	
274-322-001	Filter holder	
265-307-001	Honeycomb filter	

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	2900	26	A++
930	2900	30	A+
840	3000	26	A++
940	2900	29	A+

### Note

\*Art nr. xx = Depends on beamspread and colour choice.

Product available in other Kelvin temperatures on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.